Belinea

[Belinea 10 17 11]

The elegant partner for representative work centre.

With the Belinea 10 17 11 launches MAXDATA its first LC display in an elegant black design.

The integrated speakers and the good picture performance make this monitor a reliable partner in every office. Due to its elegant housing this display is also qualified for representative areas like e.g. foyers or consultant workstations. Like all Belinea TFTs, the Belinea 10 17 11 is certified according to TCO and TÜV Ergonomie.

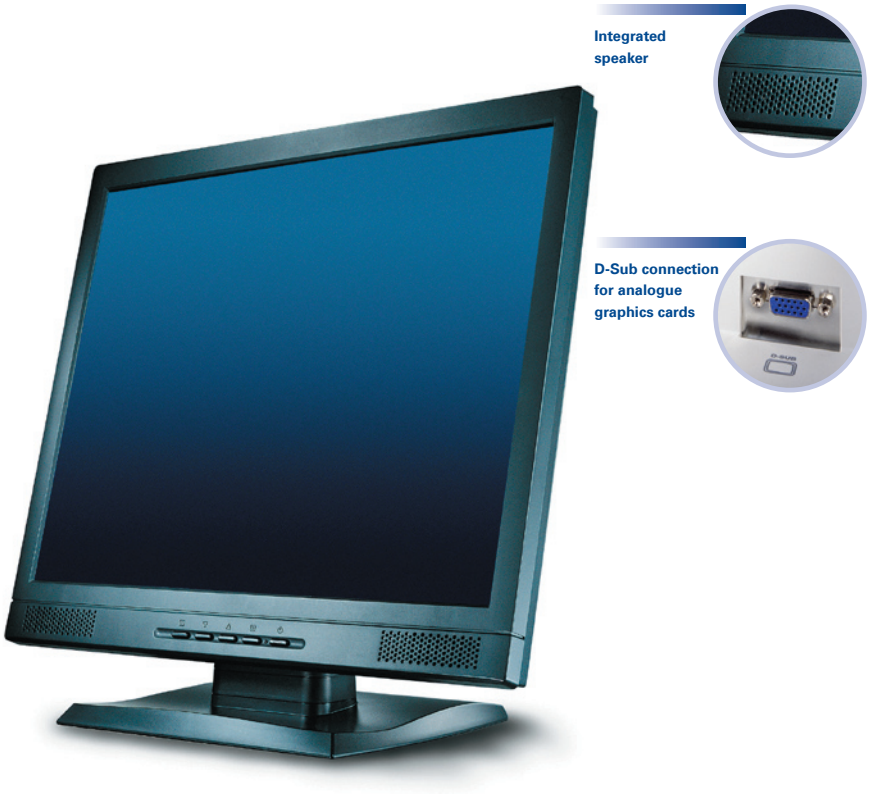

Belinea 10 17 11 – Elegant partner for multimedia

- 17 inch (43.18 cm)
- analogue
- Sound, TN-Panel
- Viewing angle: 140° / 130°
- Response time rise / fall: 9 / 16 ms

Target Groups

- **Small and medium business**
- **Price sensitive user**
- **Short reponse time for videoanimation**
- **Representative workstations**

MAXDATA Computer GmbH & Co. KG • Elbestraße 12-16 • D-45768 Marl • www.maxdata.de

07/2004 ® Erros and omissions exempt.

MAXDATA
REAL HARD WARE

Belinea 10 17 11 – Technical Data

Panel characteristics

Image size	17"
Viewable image size in inch / cm	17" / 43.18
Max. picture size (w x h) in mm	338 x 270
Physical resolution	1280 x 1024
Pixel pitch in mm	0.264 x 0.264
Active Matrix, TFT	•
Displayable colours (max.)	16.2 Mio (FRC)
Brightness in cd / qm	300
Contrast ratio	450:1
Viewing angle horizontal	140°
Viewing angle vertikal	130°
Coating	Anti Glare
Responsetime: rise / fall in ms	9 / 16
Panel technology	TN
Back Light	4 CCFLs

Electronic data

Horizontal frequency in kHz	30 - 80
Vertical frequency in Hz	50 - 75
Bandwidth in MHz	135
Input voltage 100-240V, 50-60 Hz	•
Power consumption in Watt (On / Sleep)	45 / 2
Input signal (VGA-card) analog / digital	• / –
Output audio amplifier	2 x 1 Watt

Features

Factory / user defined modes	15 / 24
OSD	•
Integrated microphone	–
Integrated speaker	•
Power supply in the panel / in the stand / external	• / – / –
Tilt back / forth	20° / 0°
Swivel right / left	– / –
Colour	BlackElegance

Controls

Brightness / contrast	• / •
H / V position	• / •
Automatic picture-adjustment / colour calibration	• / •
Temperatur	•
Fine adjustment horizontal (clock) / vertical (phase)	• / •
Display at lower resolutions: 1:1 / full screen	– / •
Zoom / frequency	– / •
Recall / video signal selection	• / –
OSD position / OSD language(s)	• / 7
Mute	•
Volume	•

Max. refresh rates in Hz with resolution

640 x 480	75
800 x 600	75
1024 x 768	75
1152 x 864	75
1280 x 1024	75

Approvals / Standards

Plug & Play, DDC1 / 2B	•
Power-Management:	
Energy Star / Energy Label	• / –
TCO99	•
TÜV GS / TÜV Ergonomie	• / •
DIN 29241 / ISO 9241-3, -7, -8 / ISO 13406-2	• / • / •
Compliant to mountings acc.to VESA standard	• (100 x 100 mm)
MAC compliant	•

Connections

15-pin Mini-D-Sub	•
24-pin DVI-D	–
Headphone plug	–
Audio In	•

Accessories

User manual (languages)	10
Power cable	•
Video connect. 15-pin Mini-D-Sub	• (non detachable)
Video connect. 24-pin DVI-D	–
Audio cable	•
Microphone cable	–

Physical specification

Size (w x h x d) in mm	374 x 370 x 195
Net / gross weight in kg	4.5 / 6.1

Warranty

3 years incl. Panel and Backlight	•

Austria
MAXDATA Computer GmbH
Ignaz-Köck-Straße 9 • 1210 Wien

Benelux
MAXDATA Benelux B.V.
Bredaseweg 113-115 • 4872 LA Etten-Leur

España • Portugal
MAXDATA Iberia
Edificio Prisma • C/ Colquide, 6
28230 – Las Rozas (Madrid)

France
MAXDATA S.A.R.L.
1, rue de Gevaudan • SILIC 1726
91017 EVRY-LISSES

Germany
MAXDATA Computer GmbH & Co. KG
Elbestraße 12-16 • 45768 Marl

Italy
MAXDATA Italia S.r.l.
Strada 1 • Palazzo F1
I-20090 Milanofiori, Assago (MI)

Poland
MAXDATA Sp. z o.o.
Ursynów Business Park • Ul. Puławska 303
02-785 Warszawa

Switzerland
MAXDATA Computer AG
Haldenstrasse 5 • 6340 Baar

United Kingdom
MAXDATA UK Limited
The MAXDATA Centre • Downmill Road
Bracknell, Berkshire RG12 1QS

With compliments: